

SM8604



Magnetic-inductive flow meter

SMN11GGX50KG/US-100

Mechanical data		
Weight	[g]	636.2
Housing		cylindrical
Inlet pipe length		3 x DN
Outlet pipe length		1 x DN
Dimensions	[mm]	Ø 54 / L = 110
Materials		stainless steel (316L/1.4404); PBT-GF20; PC; FKM; TPE
Materials (wetted parts)		stainless steel (316L/1.4404); PEEK; FKM
Process connection		threaded connection 1" NPT internal thread DN25

Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, gpm, gph, °C, °F)
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit
Display unit		l/min; m³/h; gpm; gph; °C; °F


Remarks		
Remarks		MW = measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

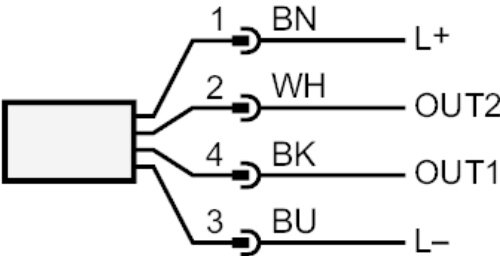

OUT1: colours to DIN EN 60947-5-2
analogue output Temperature monitoring
OUT2: analogue output volumetric flow quantity monitoring
Core colours :
BK = black
BN = brown
BU = blue
WH = white